



## 675 Zinc Air Battery





| Nominal Voltage:            | 1.4 V                          |
|-----------------------------|--------------------------------|
| Rated Capacity:             | 610 mAh at<br>620 ohm to 1.1 V |
| Nominal Internal Impedance: | 3 ohm @ 1kHz                   |
| Average Weight:             | 1.8 gm                         |
| Volume:                     | 0.57 cm <sup>3</sup>           |
| Terminals:                  | Flat                           |
| Operating Temperature       | 0°C to 50°C                    |
| Range:                      | (32°F to 122°F)                |
| ANSI:                       | 7003 ZD                        |
| IEC:                        | PR44                           |

## Typical Discharge Characteristics at 21°C (70°F)

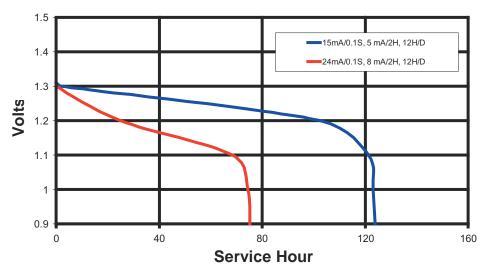



Bethel, CT 06801 U.S.A. Telephone: Toll-free 1-800-544-5454 Internet: www.duracell.com

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide.